



Kawasaki Z900


Radiator Guard

Installation Instructions




Kit Contents PRN013809


- A 2 x Plastic Washers
- B 2 x M6 x 16 Black Button Head Bolts
- C 2 x M6 Flange Nuts
- D 6 x Rubber Bungs

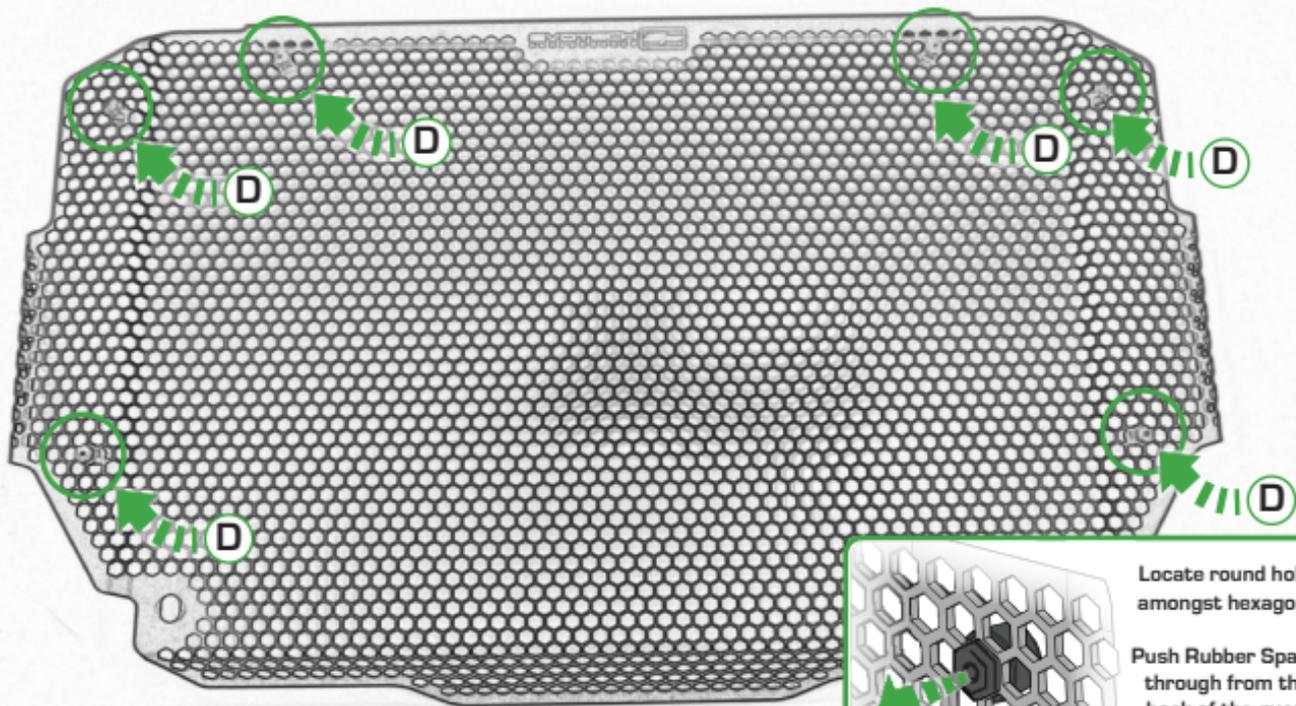


Locate round holes amongst hexagons.

Push Rubber Spacer through from the back of the guard so Hexagonal shape sits on the front face

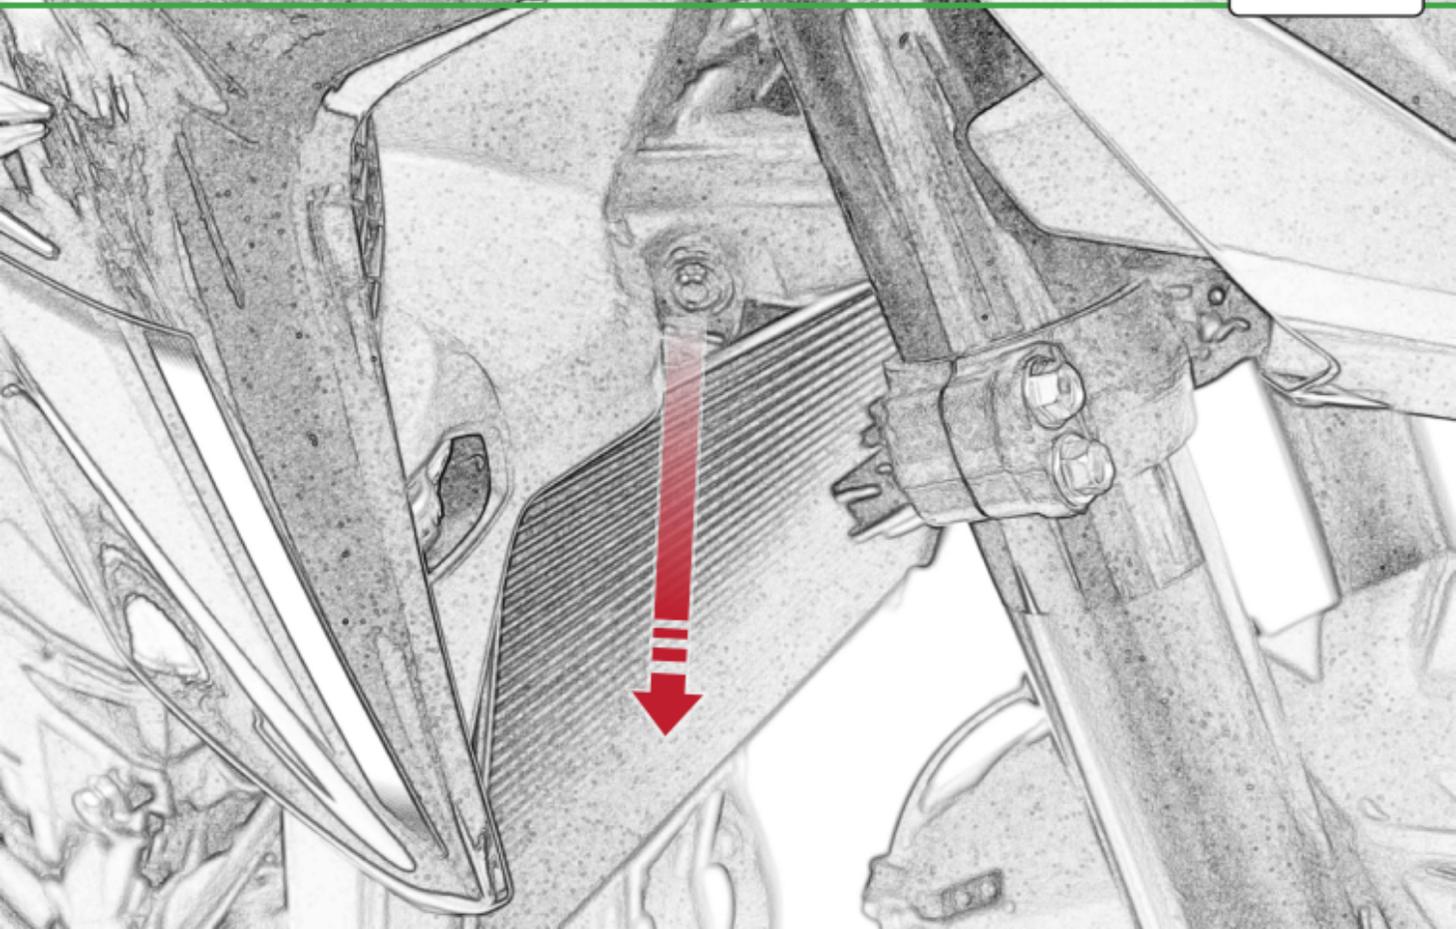



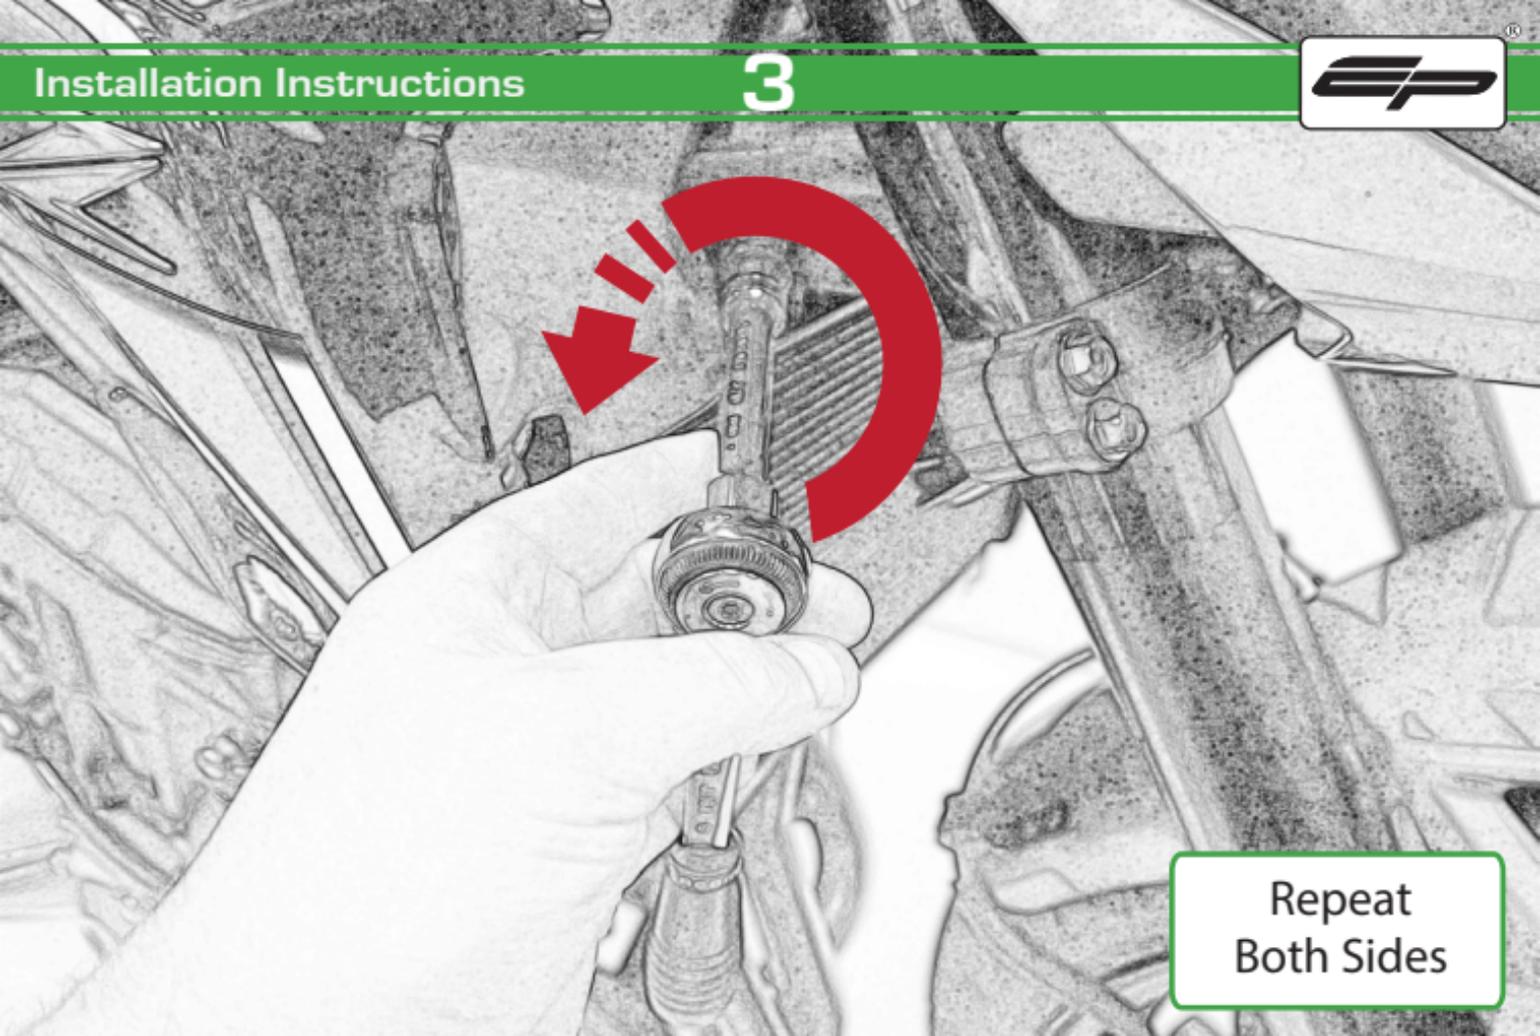


Repeat
Both Sides

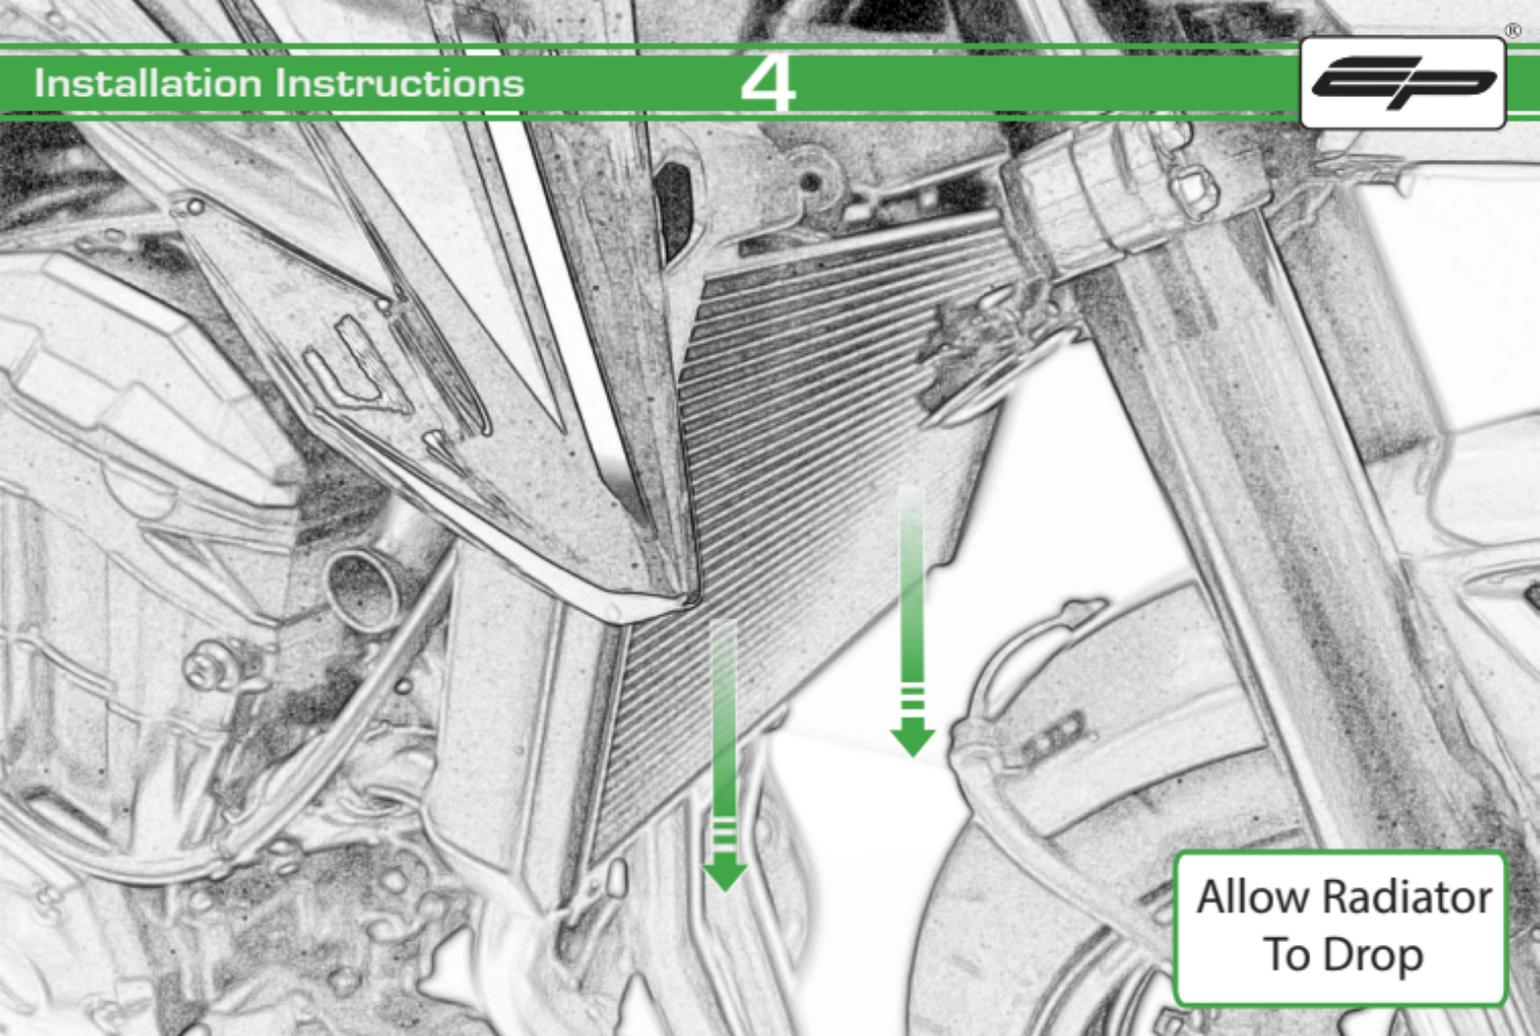


Allow Radiator
To Drop

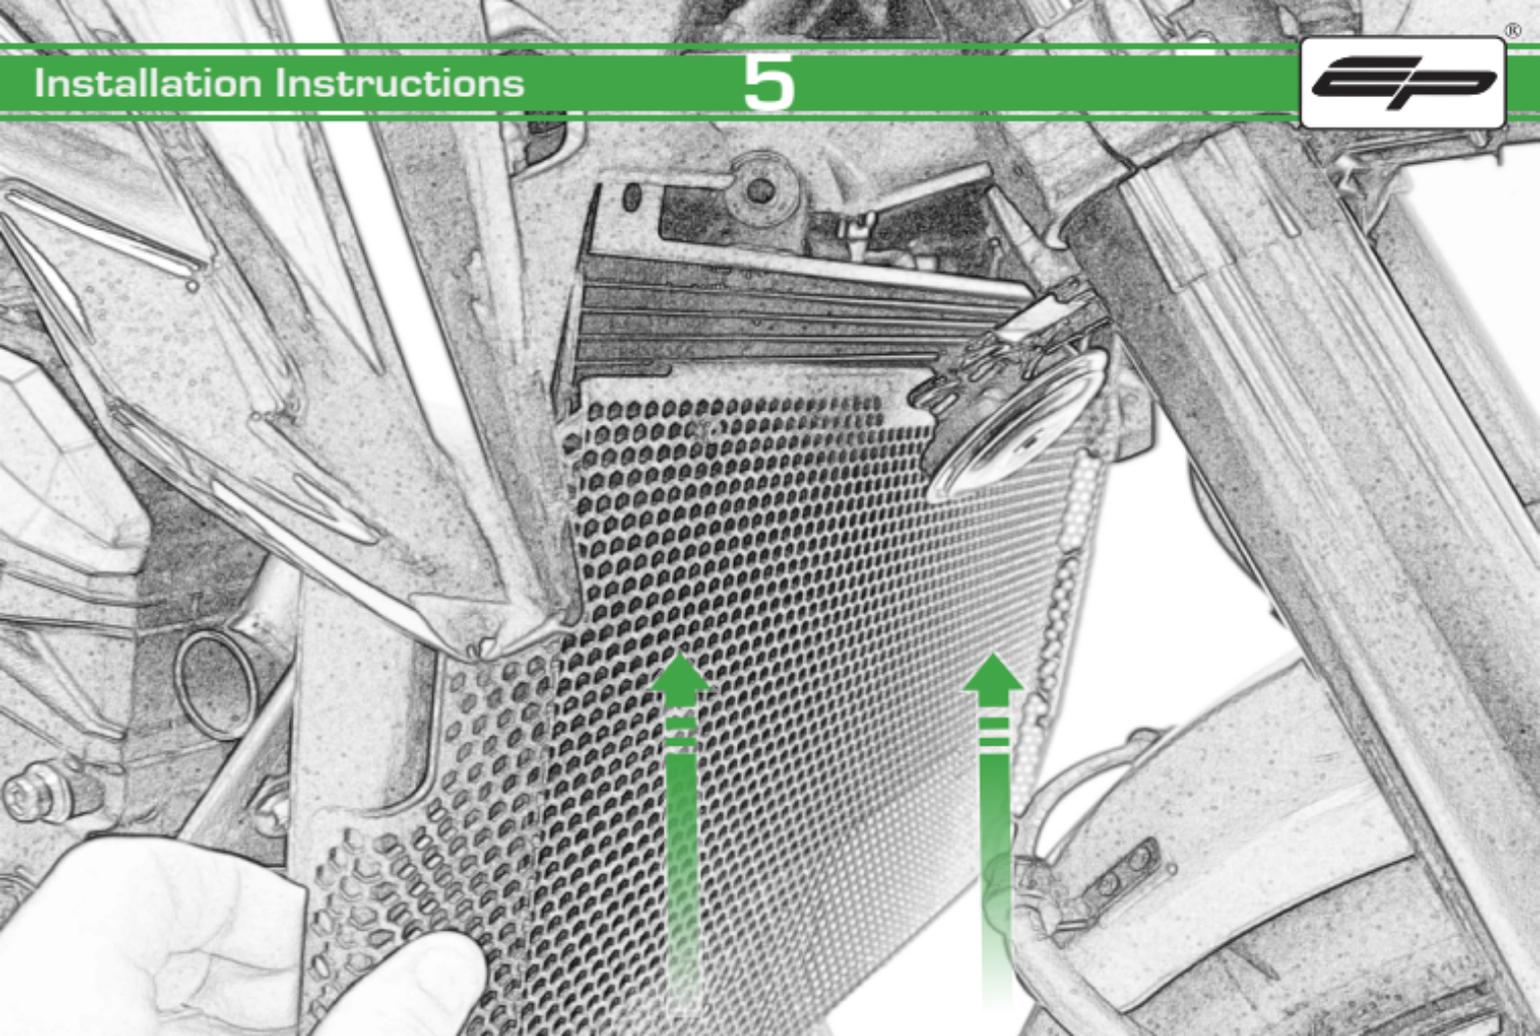

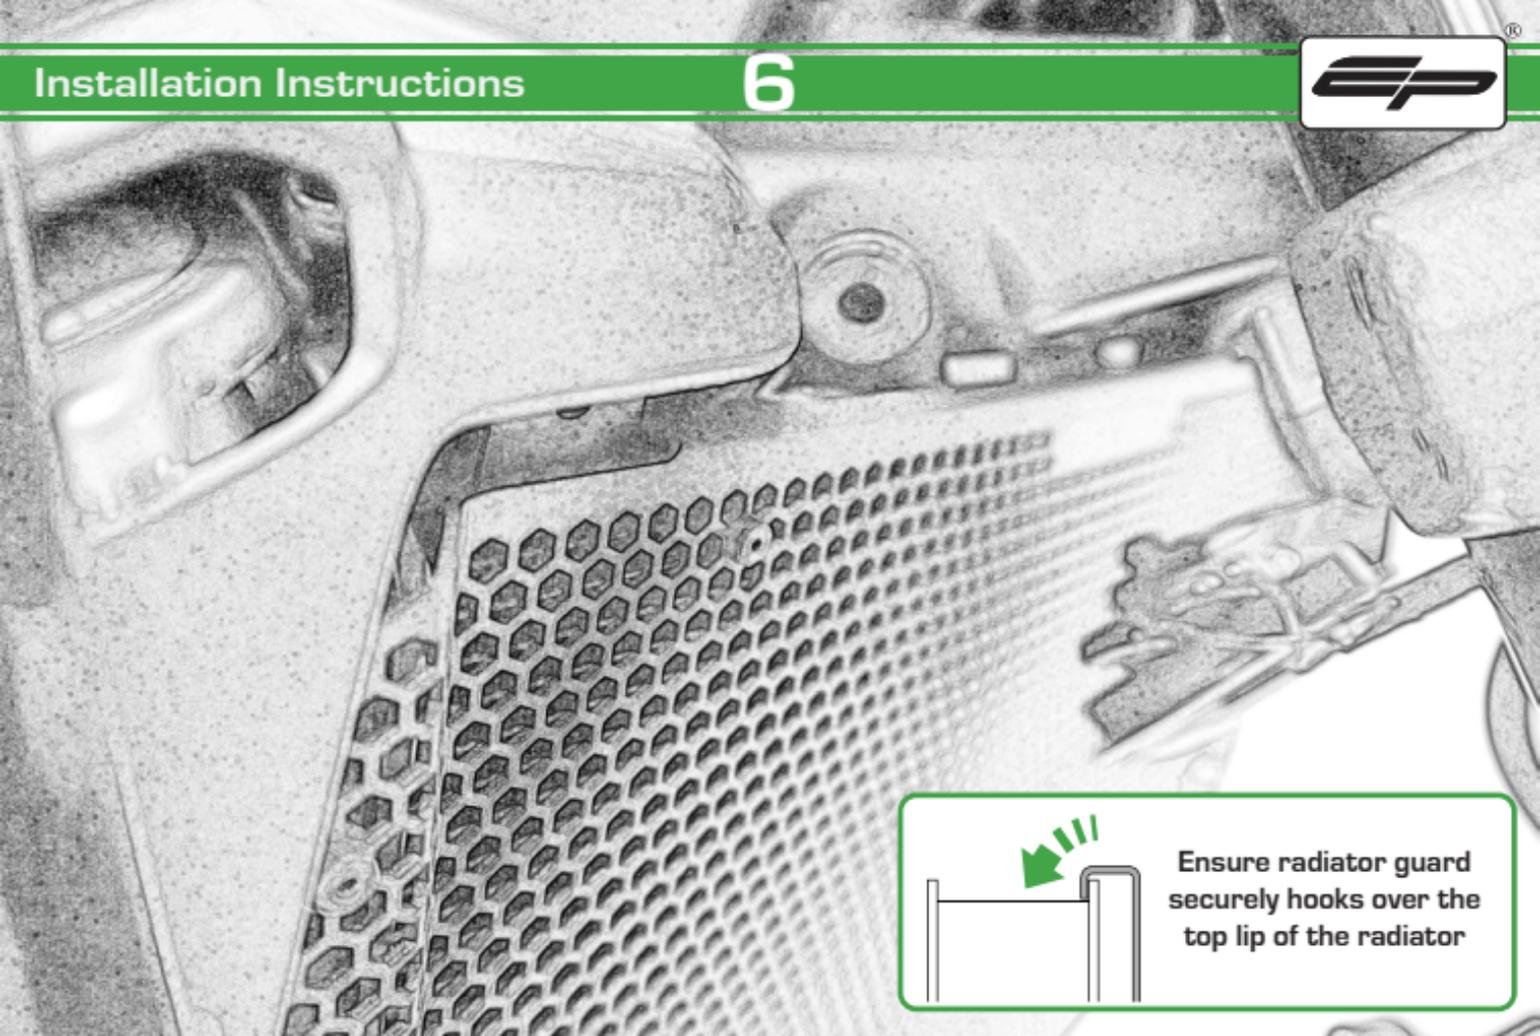


Ensure radiator guard securely hooks over the top lip of the radiator

The diagram shows a cross-section of the radiator guard's top edge. A green arrow with three short lines behind it points downwards and to the right, indicating the direction of movement for the guard's top lip to hook over the radiator's top lip.

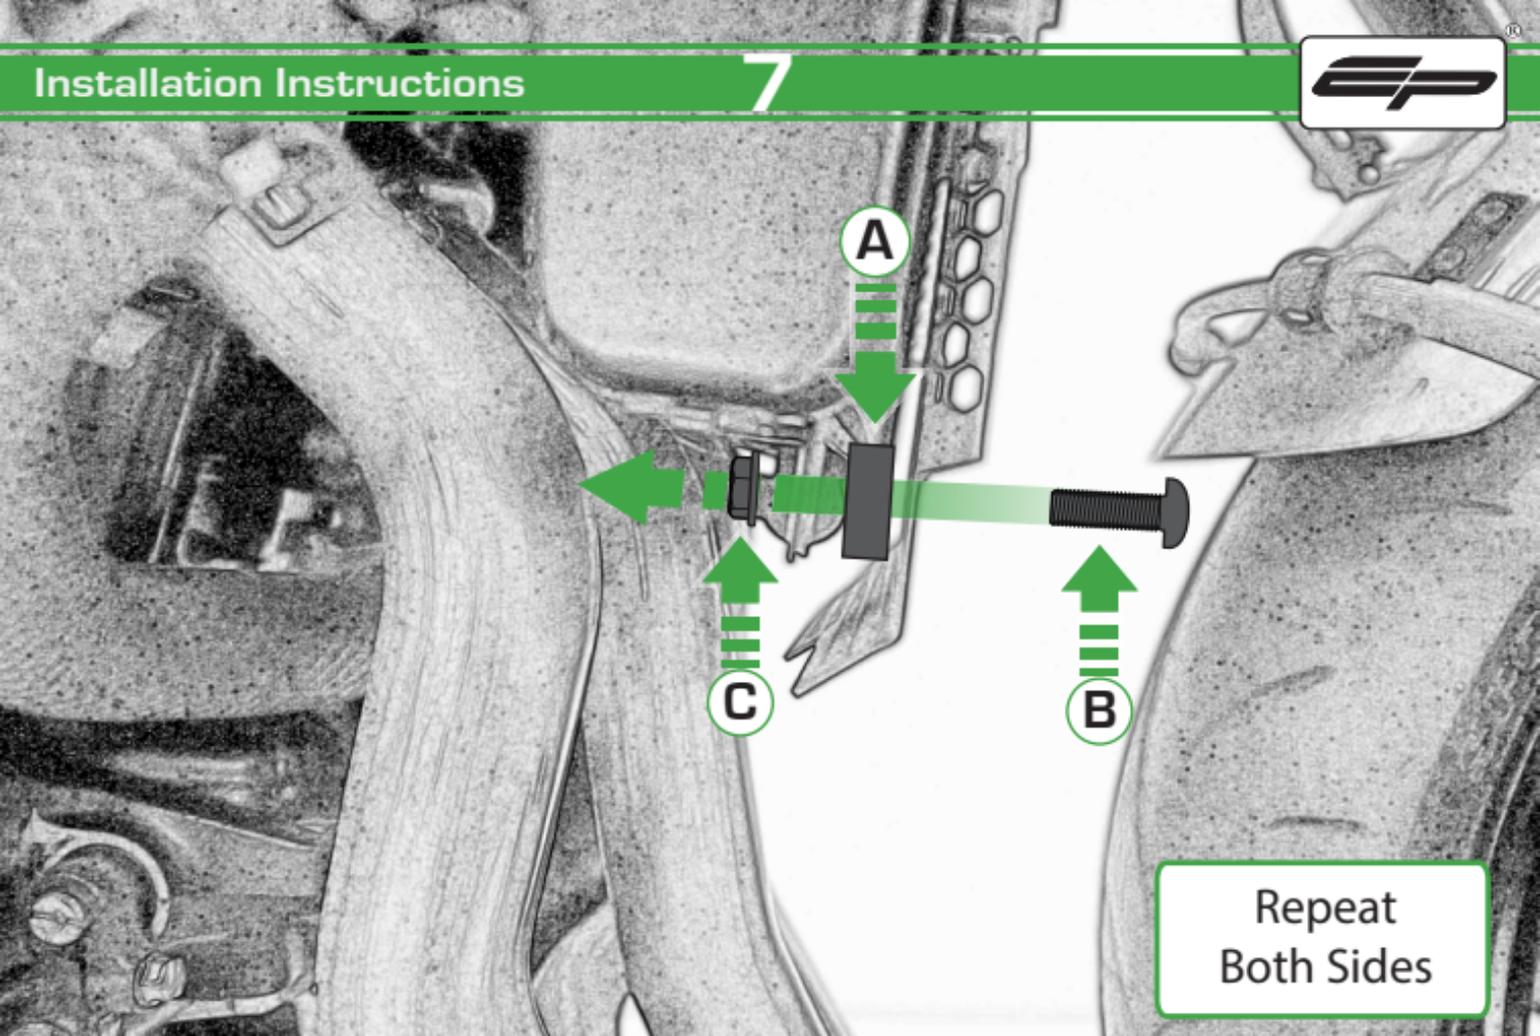

Repeat
Both Sides

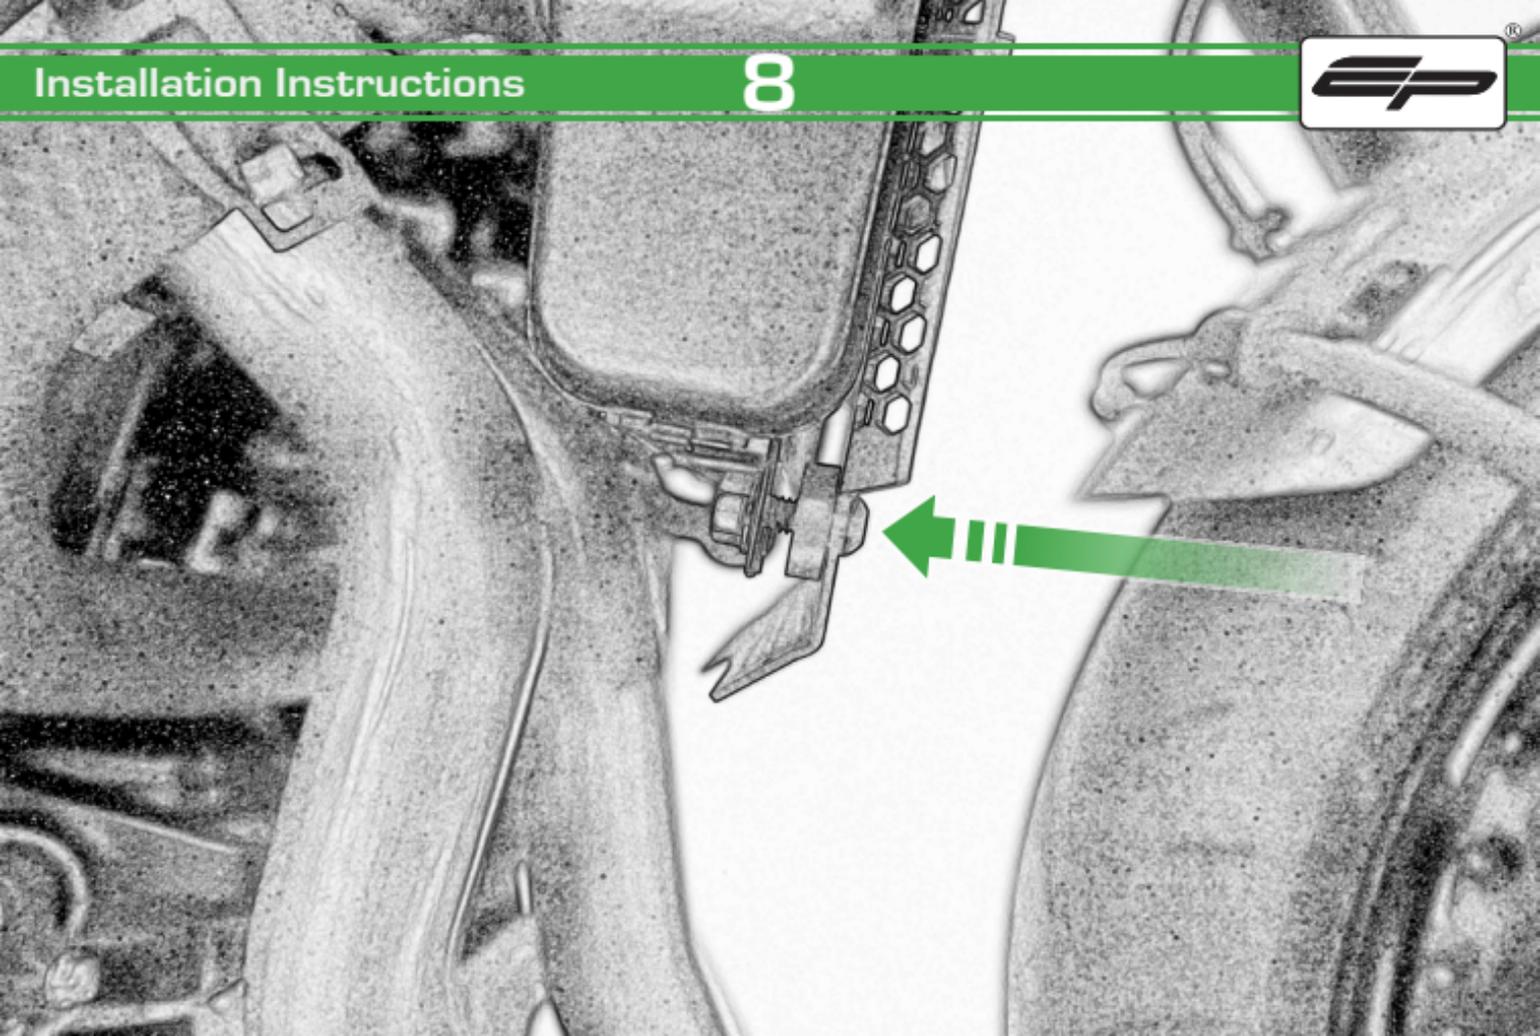



Reverse Stages

4 - 1



ESSENTIAL CHECKS



It is recommended that periodic inspections are made to ensure that dirt and debris have not become trapped between the guard and the radiator/oil cooler. Such dirt and debris would reduce the cooling efficiency of the radiator/oil cooler.

It is recommended that periodic inspections are made to ensure that all fixings are fully tightened.



EVOTECH®
P E R F O R M A N C E

www.evotech-performance.com