

Micro Flooter
accessory
spotlight

BMW F 800 R

Item-No. 730.657

Assembling instructions

Quant	item no.	description
1	151.160	Micro Flooter accessory spotlight set: 1x spotlight right (151.162) 1x spotlight left (151.161)
2	705.275HB	adapter
1	701.526HB	switch and wire harness
1	300.308	quick connector for cable
4	150.937	filister head screw M6 x16
4	150.773	allen screws M6 x 70
8	150.809	washer ø6,4
4	150.799	self-lock nuts M6
10	270.115	cable ties
2	300.307	tubing á 60 cm



Picture shows optional protection grille for Microflooter 730.100

Control all screw connections after the assembling for tightness!
Please notice our enclosed service information.

Also available:

Engine guard

Headlight grille

Rear rack (alu-rack)

Item.-No.: 502.937 01 01

Item.-No.: 700.657 00 01

Item.-No.: 650.657 01 01



Hepco & Becker GmbH
An der Steinmauer 6
D-66955 Pirmasens
Germany

Tel.: +49 6331 - 1453 - 100
Fax: +49 6331 - 1453 - 120
eMail: vertrieb@hepco-becker.de
www.hepco-becker.de

Micro Flooter
accessory
spotlight

BMW F 800 R

Item-No. 730.657

Side cases

Top cases

luggage frames

Lock it system

Softbags

Aluminium luggage

Leather luggage

Protection bars

Center stands

Chopper parts

Quad parts


Accessories



Assembling instructions

Übersicht Kabelbaum:

- 1** to the positive battery lead
- 2** to the negative battery lead
- 3** relay
- 4** switch
- 5** cable to the parking light
- 6** cable to the micro-flooters
- A** connection point

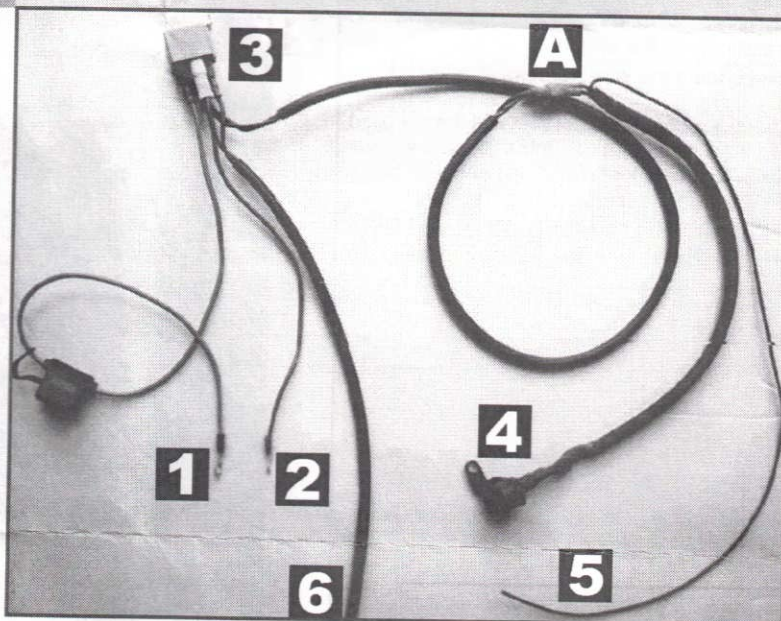

Fastening of the adapters left+right:


at the free threaded holes in the frame with allen screws M6x70 and washers ø6,4. Position as shown in the picture.




Fastening of the driving lights:

with filister head screws M6x16, washers ø6,4 and self-lock nuts M6.

Notice correct position:
cable at the inner side



1

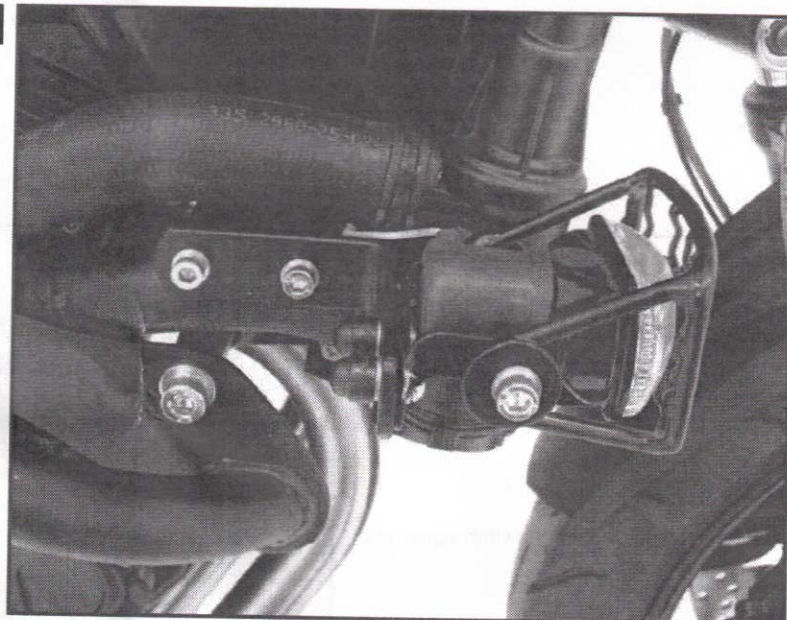

Picture shows optional protection grille for Microflooter 730.936

Micro Flooter
accessory
spotlight

BMW F 800 R

Item-No. 730.657

Side cases
Top cases
luggage frames
Lock it system
Softbags
Aluminium luggage
Leather luggage
Protection bars
Center stands
Chopper parts
Quad parts
Accessories



Assembling instructions

Fastening of the switch:

Disconnect the wire harness at point **A**

Choose a possible point to install the supplied driving light switch using the original screw, for example at the brake fluid container fixing. The black wire at the driving light switch is attached to the parking light wire by a quick connector.

2



symbol picture

Preparing:


Unmount side- and frontcover and disconnect the battery.

Connect the red wire **1** from the relay to the positive battery lead and the brown wire **2** to the negative lead.

Wire tie the relay **3** like in the picture and neatly wire tie all cables in place.

Connect the cable to the switch again with the wire harness. **A**
Connect battery.

3

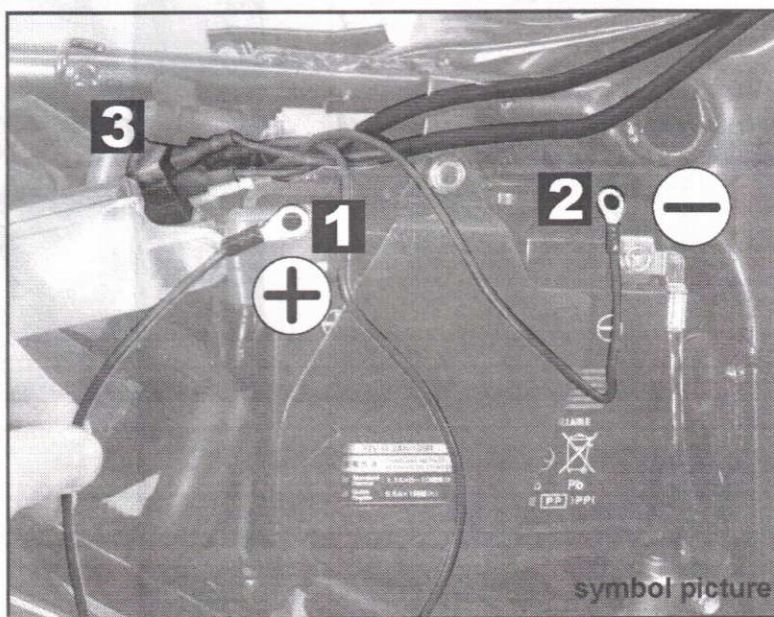

symbol picture