



NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

DUCATI HYPERMOTARD 950

REAR TURN SIGNALS

- 1 Remove (2) bolts with a 4mm allen key to take off panel underneath. (Picture 1)
- 2 Unplug main connector. (Picture 2)
- 3 Remove (3) bolts with a 6mm allen key and slide off stock tail section. (Picture 3)
- 4 Remove (4) torx bolts to expose connectors inside stock tail section and unplug the 3 of them. (Picture 4)

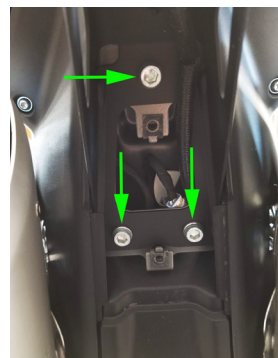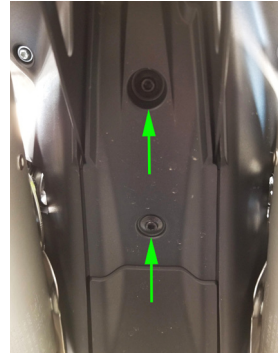


NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

REAR TURN SIGNALS

- 5 Take new turn signal bracket and mount to existing holes with stock 6mm hardware. (Picture 5)

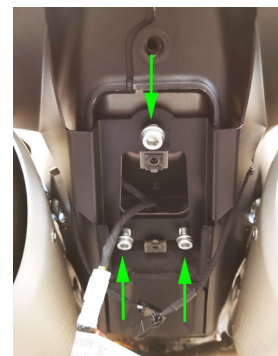

- 6 Mount panel you removed in step 1 back on bike using stock 4mm hardware. (Picture 6)

