


Box: PLOCK 1

|       |                                                                                          |           |                                     |
|-------|------------------------------------------------------------------------------------------|-----------|-------------------------------------|
| BIKE  | HONDA CBR 900 RR FIREBLADE 954                                                           | PART NO.  | EHA - 75                            |
| YEAR  | 2002 - 2004                                                                              | FIT KITS  | OVAL Z039.11073 // ROUND Z039.10073 |
| NOTES | Ensure billet is fitted with M8 x 16mm cap head bolts & spring washers prior to dispatch | DB-Killer | SCEXDBK12 - (Type B)                |

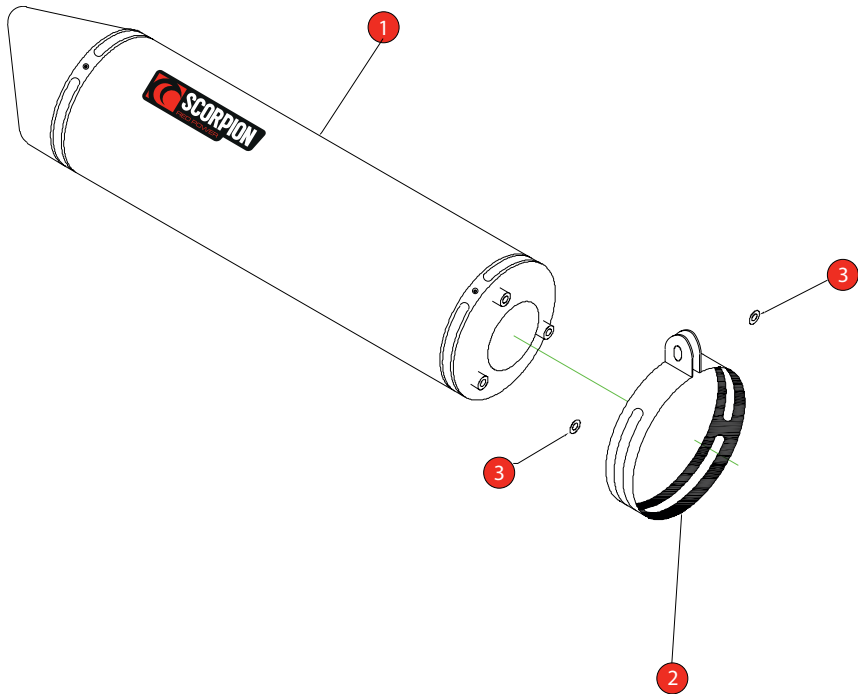

- 1 450mm Silencer (R-ZE40.22D) (O-ZE40.31D)
- 2 Composite Silencer Strap (R-Z038.10089) (O-Z038.10088)
- 3 2 x M8 x 25mm Washers (Z017.10825)

|              |                   |
|--------------|-------------------|
| E-MARK ROUND | BSAU 193a 1990/t3 |
| E-MARK OVAL  | BSAU 193a 1990/t3 |
| ISSUE NO.    | 08                |
| DATE         | 16/10/2018        |
| AUTHORISED   | J.Harkin          |
| CHECKED      |                   |

**NOTE:** ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.

- A) Remove original exhaust from bike, taking care to keep all original components in a safe place.
- B) Refit Scorpion exhaust as per line diagram above.
- C) When fitted take bike for a short ride to ensure all functions are correct.
- D) When bike & exhaust are cool enough check all nuts and bolts are still secure.