


BIKE	KAWASAKI NINJA ZX-6R	PART NO.	EKA - 85
YEAR	2009 - 2012	FIT KITS	OVAL Z039.11358
NOTES	Use standard fittings where not supplied Remove standard gasket if fitted.	DB-Killer	SCEXDBK12 - (Type B)

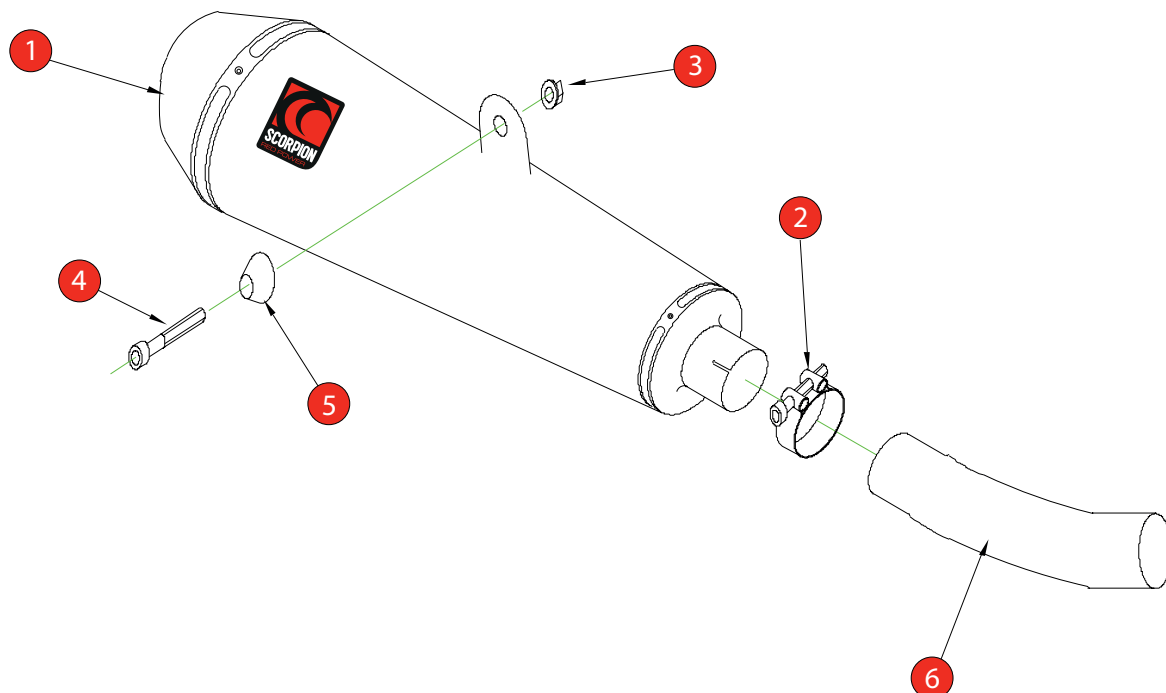

- | | |
|--|---------------------------------|
| 1 275mm Coned Silencer ESC 155 | 8 Aluminium Collar (Z026.20045) |
| 2 51 - 55mm Band Clamp (Z016.10002) | 9 M6 Split Washer (Z017.10027) |
| 3 M8 Nyloc Nut (Z017.10062) | 10 Photo Fitting Instructions |
| 4 M8 x 45mm Cap Head Bolt (Z017.10077) | |
| 5 Aluminium Bolt Finisher (Z026.20068) | |
| 6 Connecting Pipe CP 547 | |
| 7 Servo Wheel (Z007.10955) | |

E-MARK ROUND	N/A
E-MARK OVAL	KA-85  2359 
ISSUE NO.	01
DATE	17/10/2018
AUTHORISED	J.Harkin
CHECKED	

NOTE: ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.



A) Remove original exhaust from bike, taking care to keep all original components in a safe place.

B) Refit Scorpion exhaust as per line diagram above.

C) When fitted take bike for a short ride to ensure all functions are correct.


D) When bike & exhaust are cool enough check all nuts and bolts are still secure.

Servo wheel instructions follow on next page.




BIKE	KAWASAKI NINJA ZX-6R	PART NO.	EKA - 85
YEAR	2009-2012	FIT KITS	OVAL Z039.11358
NOTES	Where not supplied use original fittings	FEATURES	

CONTINUED FROM OVERLEAF:

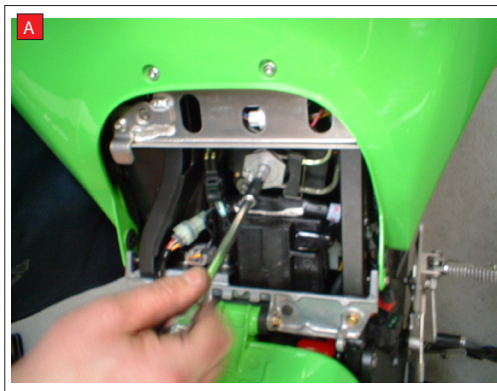

A) To disconnect cables at the seat end, you have to remove the hexagonal wheel, without turning it's shaft.
Remove bolt in centre of hexagonal wheel. Support wheel if tight.


B) Remove hexagonal wheel from shaft, retaining OE bolt. Do not turn shaft!
Remove spring clip retaining cables and completely remove the cables

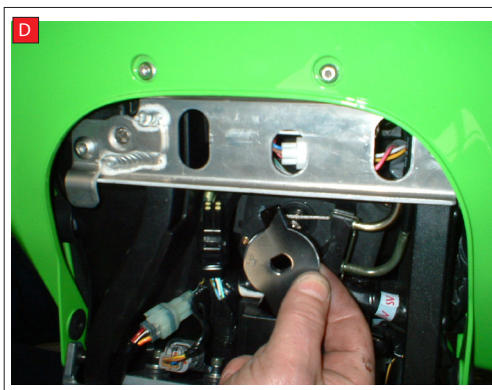

C) The replacement wheel comes with an aluminium collar that is secured in place with OE bolt and split washer.
DO NOT OVER TIGHTEN.

D) The replacement wheel must be fitted with the etched letters "UP"

E) The replacement wheel will only fit one way with the letters "UP". In case of difficulty please contact us.

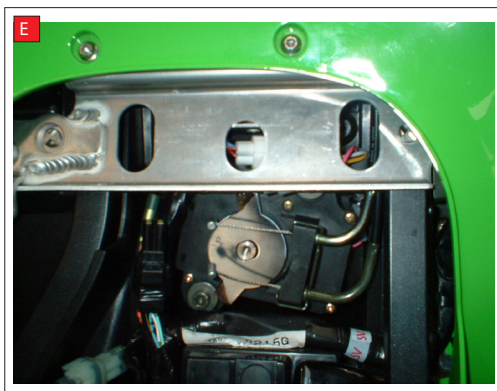

With servo wheel fitted, the loose cables will be removed with rest of exhaust system.