



NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

HARLEY DAVIDSON STREET ROD

FENDER ELIMINATOR

- 1 Remove seat and bolts using a 10mm socket. (Picture 1)
- 2 Unplug stock connectors. (Picture 2)
- 3 Remove (4) hex bolts with a 12mm socket and slide off stock tail section. (Picture 3)
- 4 Remove cap and place back onto stock plug. (Picture 4)
- 5 Install NRC tail light using the 2 stock hex bolts and supplied nuts on the lower holes, and the supplied M8x35 bolts and nuts on the upper holes. You will be mounting the plate light bracket on the left side top hole with the same supplied hardware. (Picture 5/6)
- 6 Under the seat will be the stock flasher. Unplug and plug in new LED flasher. Also plug in rest of connectors and test.

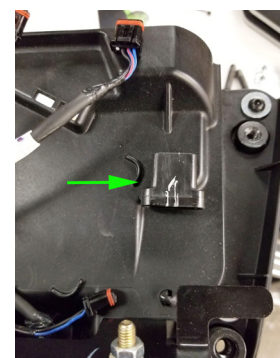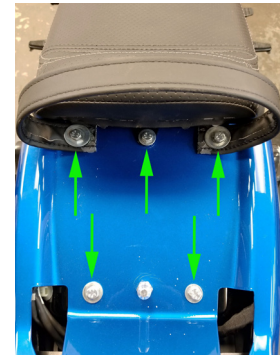

NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

FENDER ELIMINATOR

Install Side Mount License Plate

- 1 With a T50 torx and 10mm socket, remove 2 bolts. You will not be reusing the stainless fender washer. (Picture 7)
- 2 Use stock hardware to mount new side mount plate. (Picture 8)
- 3 Plug in plate light connector and test.

