


CUSTOM MOTORCYCLE ACCESSORIES

NEW RAGE CYCLES

DUCATI DIAVEL REAR TURN SIGNALS

1. Remove seat from bike
2. Remove plastic panel under seat via 6 allen bolts (picture 1)
3. Unplug 2 connectors (picture 2)
4. Remove 2 tail light bolts and rubber grommets (picture 3)
5. Put rubber grommets back in and feed wires from new tail light through grommet hole (picture 4)
6. Tighten tail light bolt, feeding bolt through provided nut (picture 5)
7. Cut stock connectors off stock tail light (picture 6)
8. *See Page 2 for wiring instructions
9. Reinstall plastic panel underneath seat
10. Put seat back onto bike, and Ride Safe!!!

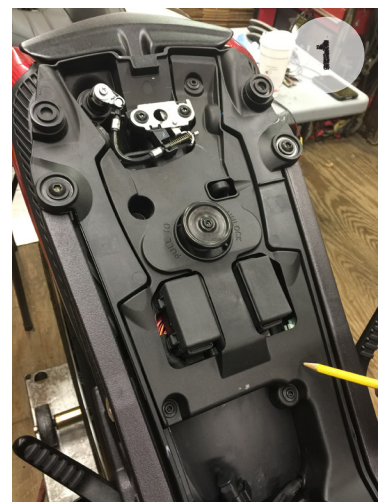


To inquire about custom parts installations

CONTACT US

INFO@NEWRAGECYCLES.COM | 914.339.2929

CUSTOM MOTORCYCLE ACCESSORIES

NEW RAGE CYCLES

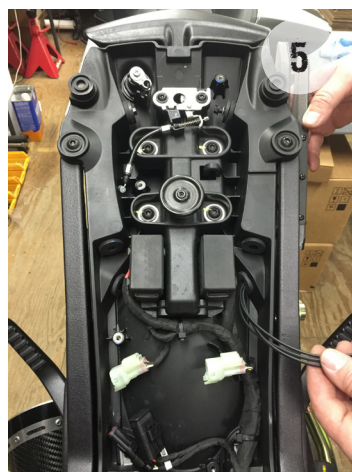

US & Euro wiring instructions as follows:

EURO MODEL

- Black plug wire > Black turn signal wires
- Grey/red plug wire > Red wire on dual element diode
- Yellow plug wire > Orange wire on dual element diode
- White/black plug wire > Left side red signal wire
- White/green plug wire > Right side red signal wire

US MODEL

- Black plug wire > Black turn signal wires
- Yellow plug wire > Orange wire on dual element diode
- White/black plug wire > Red wire on dual element diode (Left-side)
- White/green plug wire > Red wire on dual element diode (Right-side)
- Grey/red plug wire Does NOT get used (cap/tape off)

INFO@NEWRAGECYCLES.COM | 914.339.2929