





BIKE	KAWASAKI ZX 10 R	PART NO.	EKA - 80
YEAR	2008 - 2010	FIT KITS	OVAL Z039.11262
NOTES	Use standard fittings where not supplied Remove standard gasket if fitted.	DB-Killer	SCEXDBK12 - (Type B)

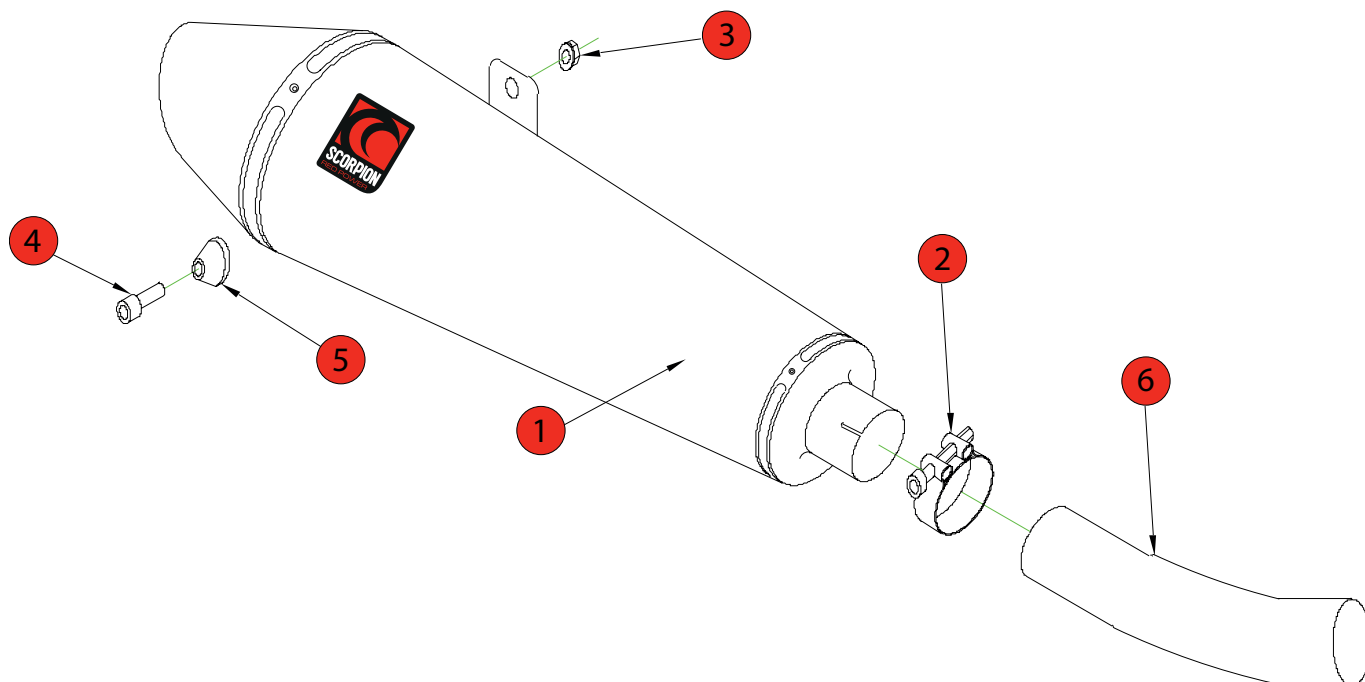

- | | |
|--|---------------------------------|
| 1 275mm Silencer ESC 127 | 8 Aluminium Collar (Z026.20045) |
| 2 51-55mm Band Clamp (Z016.10002) | 9 M6 Split Washer (Z017.10027) |
| 3 M8 Nyloc Nut (Z017.10062) | 10 Photo fitting instructions |
| 4 M8 x 35mm Cap Head Bolt (Z017.10075) | |
| 5 Aluminium Bolt Finisher (Z026.20068) | |
| 6 Connecting Pipe CP 463 | |
| 7 Servo Wheel (Z007.10955) | |

E-MARK ROUND	N/A
E-MARK OVAL	KA80 e4 2363 (9)
ISSUE NO.	05
DATE	17/10/2018
AUTHORISED	J.Harkin
CHECKED	

NOTE: ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.

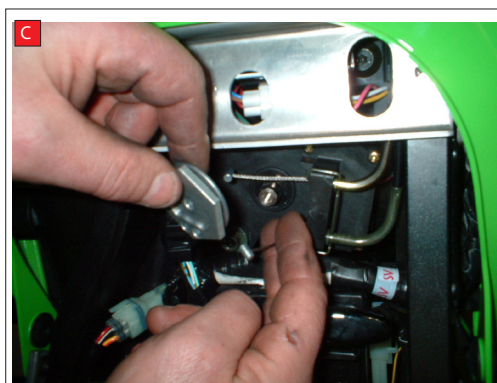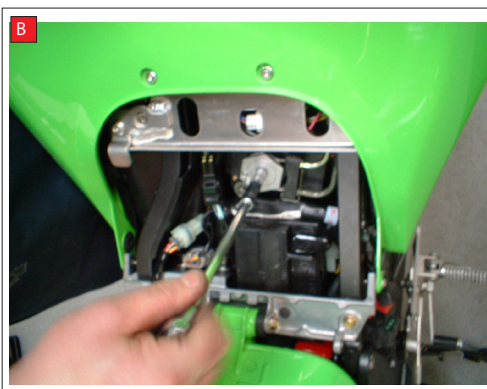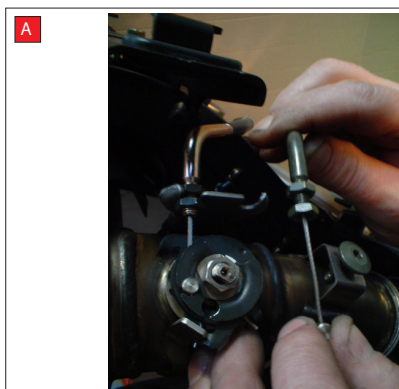

A) Disconnect cables on exhaust valve and leave loose..

B) To disconnect cables at the servo box end, you have to remove the hexagonal wheel, without turning it's shaft.
Remove bolt in centre of hexagonal wheel using an 8mm socket. Support wheel if tight.

C) Remove hexagonal wheel from shaft, retaining OE bolt. DO NOT turn shaft.
Remove spring clip retaining cables and completely remove the cables

D) The replacement wheel comes with an aluminium collar & spring washer that is secured in place with OE bolt – TIGHTEN TO 5ft/lb USING A TORQUE WRENCH.



Box: PLOCK 1

BIKE	KAWASAKI ZX 10 R	PART NO.	EKA-80
YEAR	2008 - 2010	FIT KITS	OVAL Z039.11262
NOTES	Where not supplied use original fittings.	FEATURES	

CONTINUED FROM OVERLEAF:



The replacement wheel must be fitted with the etched letters "UP"

E IS RIGHT!
F IS WRONG!